



A400 Series Drop Leg



Design Features

- Spring assisted drop leg retraction for easy use.
- Convenient down stop prevents over extension.
- Easy twist handle allows for quick extension and retraction of the drop leg.
- Continues to have all the benefits of our standard A400 series.
- Cover and bushings sealed to keep moisture out.
- 10 bolt mounting pattern adds mounting rigidity.

Capacities & Ratings

	Single Speed Leg Only	Two Speed Leg Only	Set
Max. Static Load Rating*	12,500 lbs	12,500 lbs	25,000 lbs
Rated Lift Capacity**	10,000 lbs	12,500 lbs	25,000 lbs

*When properly braced on a trailer.

**Not to exceed 40ft lbs of torque.

Gear Ratio

Low Gear: 32 Turns = 1" Travel

High Gear: 3.5 Turns = 1" Travel

Drop Leg Operation

1. Rotate the handle to the released position.
2. Place foot on base plate and push to desired location.
3. Rotate the handle back to the locked position.
4. Lift foot slowly from the base plate until it automatically locks into the next hole position.

For complete operation procedures please request user's manual LT-LG01-14.



Part Number Options

Set of Landing Gear

A400.DD.14

Gear Side Leg Only

A400R.DD.14

Non-Gear Side Leg Only

A400L.DD.14

Cross Shaft



Example: B10363.56.5

Mount Style
Inside Mount - B10363
Outside Mount - B10066

Overall Length (in)
Standard Inside Mount = 56.5"
Standard Outside Mount = 68.4"

Note on Determining Length:


Inside Mount = Frame Width - 19.5"
Outside Mount = Frame Width - 7.6"

Crank Hanger




B10261

Travel Dimensions

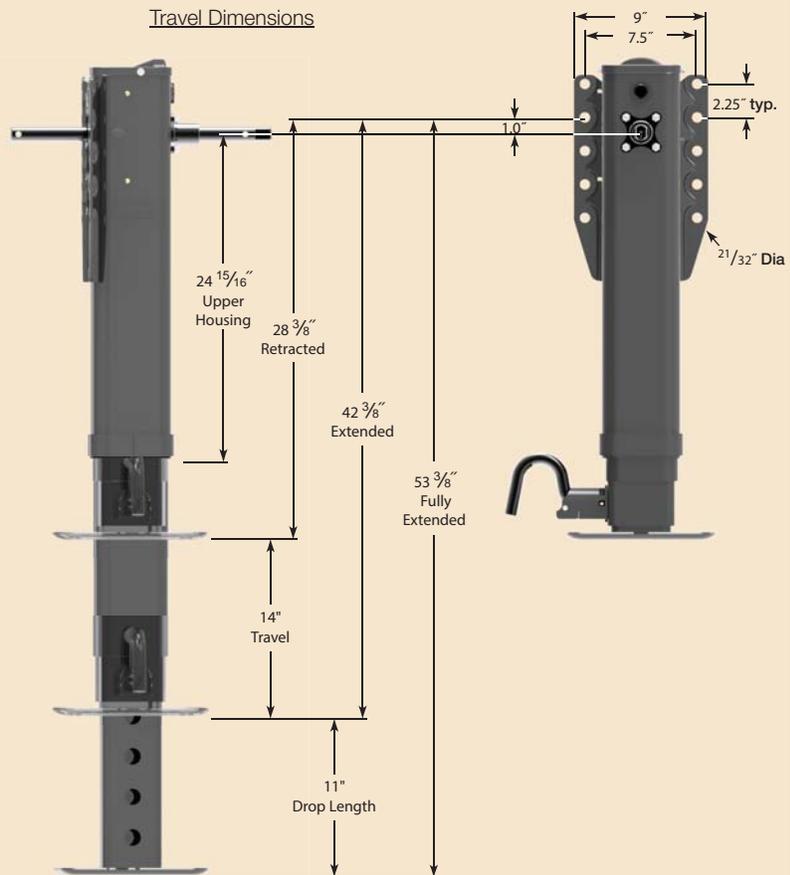

Crank Handle

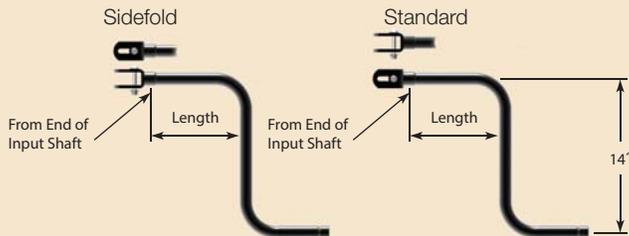

Example : C10592.1

Standard - C10592
Sidefold - C10591

Length

- 1 - 5 1/4"
- 2 - 8 1/4" (Standard)
- 3 - 10 1/2"
- 4 - 17 3/4"
- 5 - 14 3/4"