


# AX Aluminum Series Drop Leg

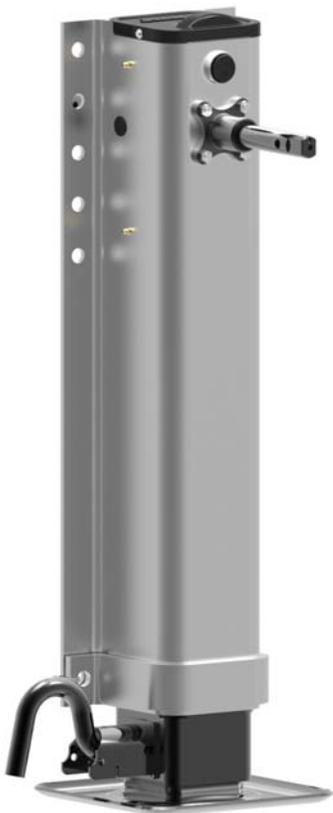

## Design Features

- Lightweight and corrosion resistant.
- Spring assisted drop leg retraction for easy use.
- Convenient down stop prevent over extension.
- Easy twist handle allows for quick extension and retraction of the drop leg.
- Continues to have all the benefits of our standard AX series.
- Cover and bushings sealed to keep moisture out.

## Capacities & Ratings

	Single Speed Leg Only	Two Speed Leg Only	Set
Max. Static Load Rating*	12,500 lbs	12,500 lbs	25,000 lbs
Rated Lift Capacity**	10,000 lbs	12,500 lbs	25,000 lbs

\*When properly braced on a trailer.

\*\*Not to exceed 40ft lbs of torque.

### Gear Ratio

Low Gear: 32 Turns = 1" Travel

High Gear: 3.5 Turns = 1" Travel

## Drop Leg Operation

1. Rotate the handle to the released position.
2. Place foot on base plate and push to desired location.
3. Rotate the handle back to the locked position.
4. Lift foot slowly from the base plate until it automatically locks into the next hole position.

**For complete operation procedures please request user's manual LT-LG01-14.**



## Part Number Options

Set of Landing Gear

AX100.DD.14


Gear Side Leg Only

AX100R.DD.14

Non-Gear Side Leg Only

AX100L.DD.14

### Cross Shaft




Example: B10363.56.5

Mount Style  
Inside Mount - B10363  
Outside Mount - B10066

Overall Length (in)  
Standard Inside Mount = 56.5"  
Standard Outside Mount = 68.4"


Note on Determining Length:  
Inside Mount = Frame Width - 19.5"  
Outside Mount = Frame Width - 7.6"

### Crank Hanger



B10261

### Crank Handle

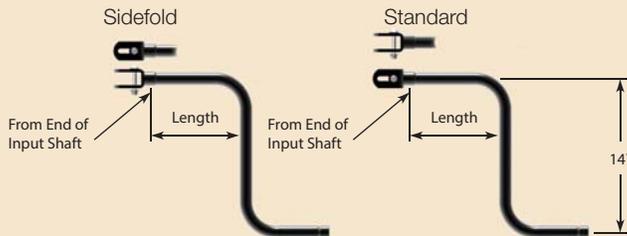

Example : C10592.1

Standard - C10592  
Sidefold - C10591

#### Length

- 1 - 5 1/4"
- 2 - 8 1/4" (Standard)
- 3 - 10 1/2"
- 4 - 17 3/4"
- 5 - 14 3/4"

### Travel Dimensions

